






A300

















EN13000



















**LIFTING CAPACITY CHART - TABELLE DI CARICO
TABLEAUX DES CHARGES - TRAGKRAFT TABELLE
LASTTABEL - TABLAS DE CARGA**


s/n:

				
5.5 m	8.05m ÷ 24.05m	4.2 t	360°	CODE 01 - 13

	CODE 01										CODE 13		
	8.05 m		10.70 m		13.40 m		16.10 m		18.75 m		24.05 m		
													
Max 78.0°	30.00	Max 78.0°	23.00	Max 78.0°	21.00	Max 78.0°	19.00	Max 78.0°	13.80	Max 78.0°	8.40		
3.0	58.0	30.00	67.0	23.00	72.0	21.00	76.0	19.00					3.0
3.5	53.0	25.00	64.0	23.00	70.0	20.00	74.0	18.60					3.5
4.0	49.0	22.50	61.0	22.50	67.0	20.00	72.0	16.90	75.0	13.80			4.0
4.5	43.0	20.00	57.0	20.00	65.0	18.50	70.0	15.00	73.0	13.00			4.5
5.0	37.0	18.00	53.0	18.00	63.0	17.00	68.0	14.00	72.0	12.50	76.0	8.40	5.0
6.0	19.0	14.50	46.0	14.50	58.0	14.00	64.0	12.10	69.0	11.00	73.6	8.00	6.0
7.0			37.0	11.20	52.0	11.20	60.0	10.60	66.0	9.50	70.9	7.00	7.0
8.0			27.0	8.90	46.0	8.90	55.0	8.90	63.0	8.30	68.5	6.30	8.0
9.0					39.0	7.50	51.0	7.50	60.0	7.20	65.9	5.80	9.0
10.0					32.0	6.30	46.0	6.30	55.0	6.30	63.2	5.60	10.0
11.0					21.0	5.10	41.0	5.10	51.0	5.10	60.6	4.70	11.0
12.0							34.0	4.40	47.0	4.40	57.7	4.20	12.0
13.0							26.0	3.70	42.0	3.70	54.7	3.80	13.0
14.0							15.0	3.30	36.0	3.30	51.6	3.50	14.0
15.0									29.0	2.90	48.4	3.10	15.0
16.0									22.0	2.60	44.8	2.80	16.0
17.0									5.0	2.30	41.0	2.40	17.0
18.0											36.8	2.30	18.0
19.0											32.4	2.10	19.0
20.0											27.1	1.70	20.0
21.0											21.4	1.60	21.0
22.0											11.4	1.50	22.0
23.0													23.0
24.0													24.0
25.0													25.0
 min													 min

					
14.00R24 -16.00R25	0 Km/h	8.05m ÷ 13.40m	4.2 t	360°	CODE 02


	8.05 m		10.70 m		13.40 m		
							
	Max 65.0°	10.50	Max 65.0°	7.80	Max 65.0°	5.10	
3.0	58.0	10.50					3.0
4.0	49.0	7.80	61.0	7.80			4.0
5.0	37.0	5.10	53.0	5.10	63.0	5.10	5.0
6.0			46.0	3.90	58.0	3.90	6.0
7.0			37.0	2.90	52.0	2.90	7.0
8.0					46.0	2.15	8.0
9.0					39.0	1.60	9.0
10.0							10.0
12.0							12.0
14.0							14.0
16.0							16.0
 min							 min
L max $\alpha = 0^\circ$	13.40 m		13.40 m		13.40 m		L max $\alpha = 0^\circ$

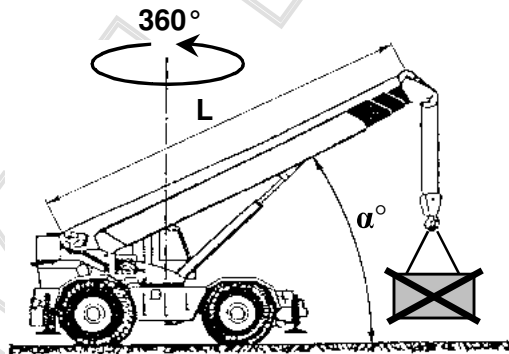


L =	α° max.
8.05 m	65°
10.70 m	65°
13.40 m	65°

Characteristics

Operation and maintenance manual

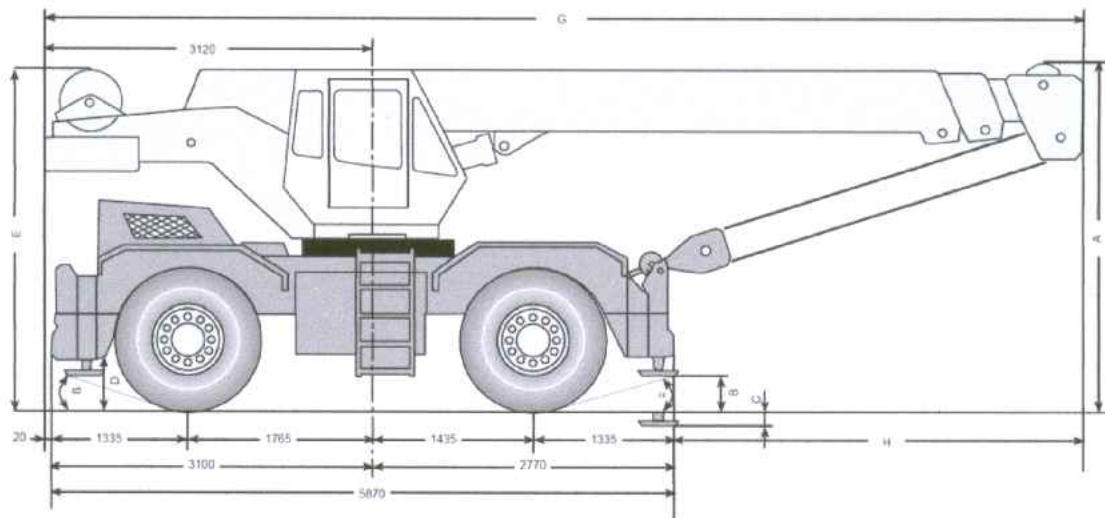

4 ruote sterzanti (quote tra parentesi)
 4 wheel steering (numbers in brackets)
 4 roues directrices (chiffres entre crochets)
 bei Vierradlenkung (Angaben in Klammern)

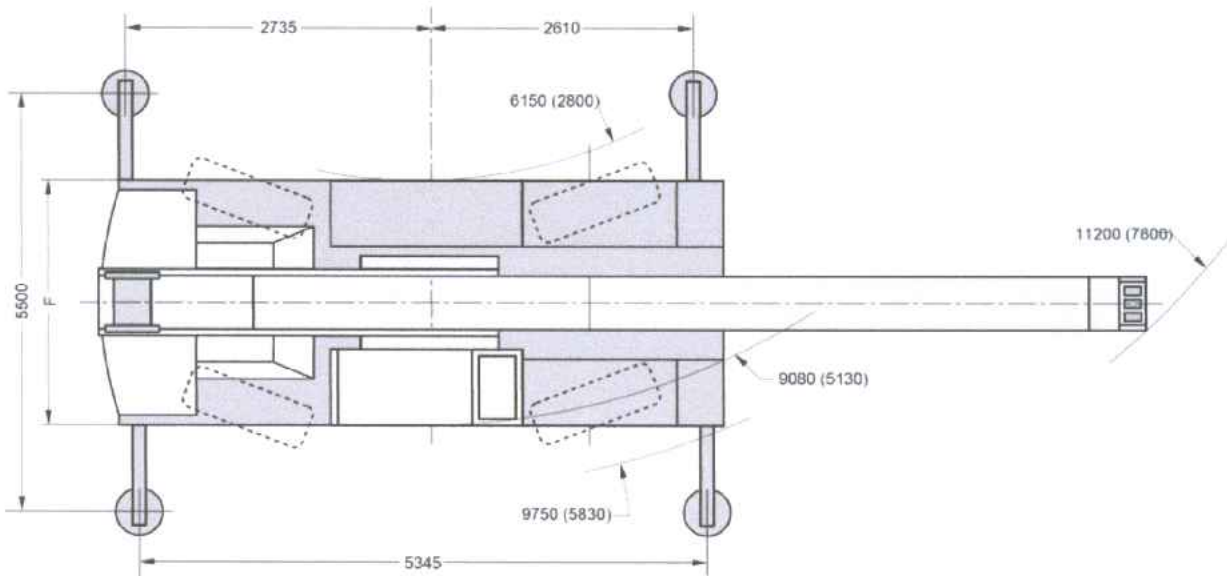

Dimensions ⁽⁴⁾										
Tyres	A	E	C	B	D	F	G	H	α	β
14.00R24	3400	3200	150	360	500	2500	9635	3745	21°	20°
16.00R25	3440	3240	190	400	540	2500	9635	3745	21°	20°

(4) Average reference values, which are indicative only. Values are expressed in mm